


Franke Omni

Hot/Cold Valve Change Guide

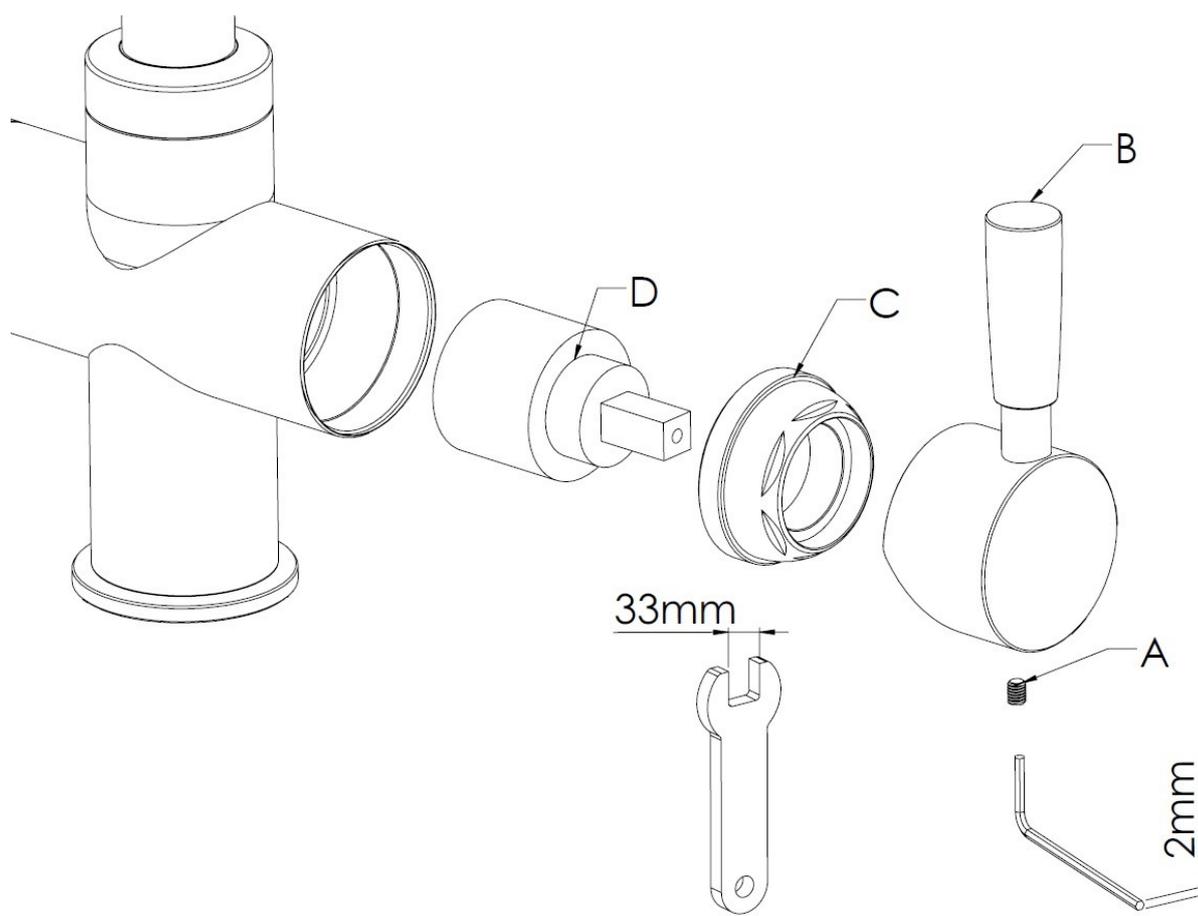

Before you begin

Replacing the Hot/Cold valve of an Omni tap is a straightforward procedure for any competent handy person. However, should you have any doubts about your ability to tackle the task we suggest you engage a suitably qualified professional.

Tools required:

1. A 2mm Allen Key (Supplied).
2. 33mm spanner or a suitable adjustable spanner.

The valve change procedure:

1. Operate the switch on the front of the boiler to switch off the boiler power supply.
2. Shut off the water supply to the filter using the adjacent stop-valve.
3. Activate the Hot and Cold mechanism to release any pressure and water in the system.
4. Unscrew the grub screw (A), using the 2mm Allen key.
5. Remove handle (B).
- 6 Using a 33mm or adjustable Spanner unscrew retaining nut (C).
7. Remove valve (D) from the tap body.
8. Position new valve (D) into the tap body whilst ensuring the two protruding lugs on the valve are located into the two holes of the tap body.
9. Screw nut (C) into the tap body and tighten firmly with a 33mm or adjustable spanner.
10. Reposition handle (B) and secure in place using the grub screw (A) with the 2mm Allen key.
11. Turn on the water via the stop valves.
12. Activate the Hot and Cold lever until water is being dispensed from outputs.
13. Check for leaks.
14. Switch on the power to the boiler and allow 20 minutes for the water to re-heat. The product will then be ready for use.